


ENZIS INSTALLATION INSTRUCTIONS





Rainbow MR16 Spot

ART. NO.	
140 737bz	bronze, red glass
140 737mc	matte chrome, red glass
140 738bz	bronze, orange glass
140 738mc	matte chrome, orange glass
140 739bz	bronze, turquoise glass
140 739mc	matte chrome, turquoise glass
140 740bz	bronze, smoky glass
140 740mc	matte chrome smoky glass

TECHNICAL DATA

Description: Light Fixture


⚠ IMPORTANT SAFETY INSTRUCTIONS ∠

- I. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH LOCAL NEC CODE.
- 2. FOR USE WITH ENZIS RAIL NETWORK ONLY.
- The Enzis rail system is not intended for use with a power supply cord or convenience receptacle adaptor. This rail system is to be supplied by Bruck Lighting.
- 4. Do not install the Enzis rail system in damp or wet locations.
- 5. Do not install any part of a rail system less than 5 feet above the floor
- Do not install any fixture assembly closer than 6 inches from any curtain, or similar combustible material.
- Disconnect electrical power before adding to or changing the configuration of the rail.
- Do not attempt to energize anything other than lighting rail fixtures on the rail. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the rail.
- This track system MUST BE HARD WIRED. For all the wire connections, use Listed Wire Nuts.
- 10. Do not connect a rail to more than one circuit unless the rail is constructed so that it can be used with more than on circuit. Check with a qualified electrician. Although the rail lighting system may seem to operate acceptably, a dangerous overload of the neutral may occur and result in a risk of fire.
- 11. Secondary connections must be clean and tight to avoid arcing and overheating!
- 12. Power Feed must be 3 inches away from any support and 6 inches away from fixture.
- Warranty is void in case of unauthorized modifications and/ or improper use.

SAVE THESE INSTRUCTIONS AND REFER
TO THEM WHEN ADDITIONS TO OR
CHANGES IN THE TRACK
CONFIGURATION ARE MADE

CONTENTS OF DELIVERY

1 Fixture

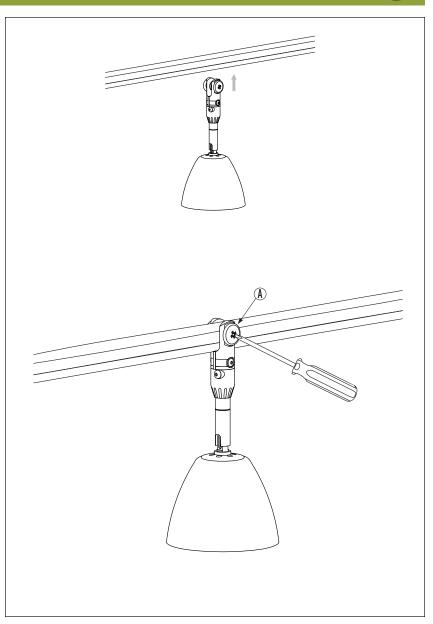

USER MANUAL

INSTALLING FIXTURE

- Place fixture onto Enzis track.
- Secure fixture by tightening thumb screws (A) with phillips head screwdriver, #3 is the recommended size to use.